



Customer Service Note

Product Marks, Product Labels, and Packaging Labels

Introduction

Micron uses various marks and labels on our products and packaging. The first section of this customer service note describes the product marks and labels we place on our devices. The second section describes the labels used on and in our packaging.



Table of Contents

Introduction	1
Product Marks and Labels.....	4
Component Mark Information	4
Abbreviated Component Mark Information	5
Module Label Data and Examples	7
Process Codes	10
SSD Label Information.....	12
Micron Packaging Labels.....	21
Master Container Labels.....	21
Bar Code Information	21
Individual Packaging Labels	22
Revision History.....	26

List of Figures

Figure 1:	TSOP Component Mark	5
Figure 2:	SOP2/W-PDFN/BGA/LGA Abbreviated Component Mark.....	6
Figure 3:	Legacy BGA Component with Elpida Part Mark	6
Figure 4:	LRDIMM, RDIMM, UDIMM and SODIMM DRAM Module Label Content.....	7
Figure 5:	NVDIMM Additional Label Content.....	8
Figure 6:	ECC UDIMM/SODIMM Label Example	8
Figure 7:	SSD MID Label	12
Figure 8:	Micron Standard 2.5 SSD Label Structure	12
Figure 9:	2.5-inch Label Structure – M5XX(DC/IT)/M600	14
Figure 10:	Micron Standard M.2 SSD Label Structure	16
Figure 11:	mSATA Label Structure – M6XX	18
Figure 12:	Embedded USB Label Structure	20
Figure 13:	Standard Master Container Shipping Label	21
Figure 14:	Standard Master Container Bar Code Label.....	22
Figure 15:	Standard Bar Code Label.....	23
Figure 16:	Micron’s Inner Packing Container Label.....	23
Figure 17:	Micron’s Inner Packing Container Label for Modules and SSDs.....	23
Figure 18:	Micron’s Moisture Sensitivity (MST) Label.....	24
Figure 19:	Labeling on Moisture-Barrier and Static-Shielding Bags ¹	24

Product Marks and Labels

Most of Micron's component products use one of two product mark variations to accommodate smaller components and different package sizes (for example, FBGA and CSP). Both product marks are right- and left-justified and have a character height of 0.040–0.050 inches depending on package size. Both marks also include a unique, laser-inscribed identification number on the top side of the part for traceability purposes.

Legacy component products with Elpida part marks use the same part marks used prior to Micron's acquisition of Elpida. Further information may be found in our product guides and on Micron's Web site: www.micron.com/numbering.

Component Mark Information

Most component marks contain the following details (see Figure 1 on page 5):


- Date code (year and workweek)
- Special mark characters
- Country of diffusion (see below for country codes)
- Country of encapsulation (see below for country codes)
- Micron® mark or logo
- Product family
- Process technology
- Device number
- Device versions
- Package type
- Speed
- Special test option (if relevant)
- Die revision
- Scribe

For more information on product-specific designators, see the part numbering guides on Micron's Web site: www.micron.com/numbering.

Codes for the countries of diffusion and encapsulation:

1 = USA	5 = China	B = Israel
2 = Singapore	7 = Taiwan	C = Ireland
3 = Italy	8 = Korea	D = Malaysia
4 = Japan	9 = Mixed	F = Philippines

Figure 1: TSOP Component Mark

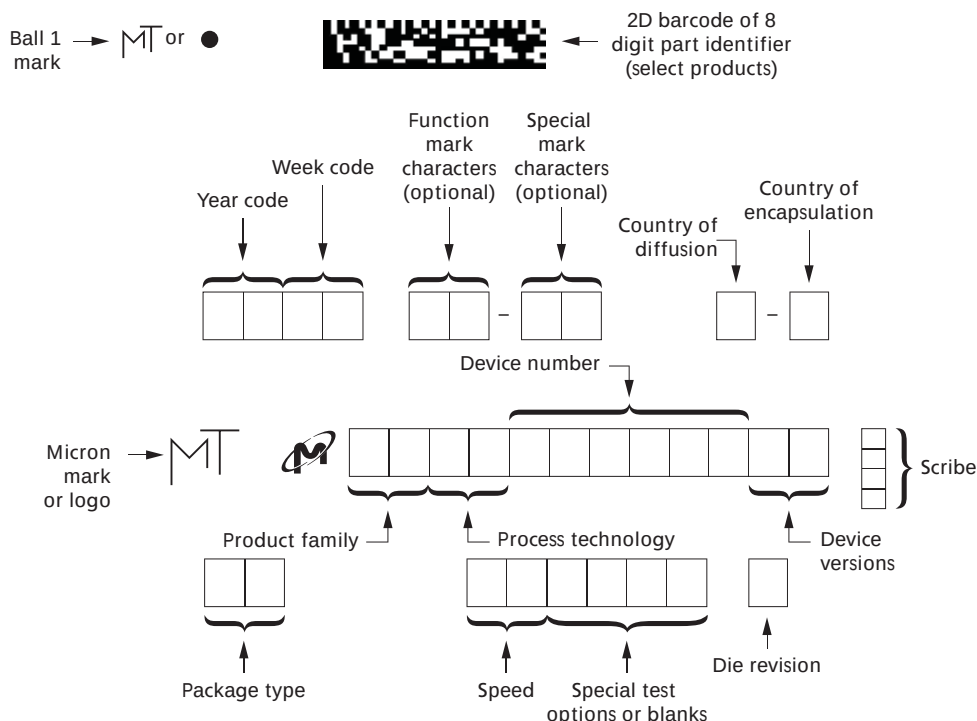

Abbreviated Component Mark Information

Due to space limitations, FBGA-package component marks contain abbreviated details for two distinct types of information (see Figure 2 on page 6). The top row of the component mark contains the flooring details that are unrelated to product type:

- Date code (see below)
- Die revision
- Country of diffusion (see below for country codes)
- Country of encapsulation (see below for country codes)

Date codes are alphanumeric characters that indicate the year and workweek the parts were marked, in even-numbered workweeks. The first character is the last number in the year, and the second (alpha) character is the workweek.

A = 2	E = 10	I = 18	M = 26	Q = 34	U = 42	Y = 50
B = 4	F = 12	J = 20	N = 28	R = 36	V = 44	Z = 52
C = 6	G = 14	K = 22	O = 30	S = 38	W = 46	
D = 8	H = 16	L = 24	P = 32	T = 40	X = 48	

Codes for the countries of diffusion and encapsulation:

1 = USA	5 = China	B = Israel
2 = Singapore	7 = Taiwan	C = Ireland
3 = Italy	8 = Korea	D = Malaysia
4 = Japan	9 = Mixed	F = Philippines


The middle and bottom rows of the component mark contain product-specific details such as:

- Micron logo/ball 1 designator
- Coded part number

- Product family
- Special mark characters


More information on product-specific designators is provided in Micron's various part numbering guides, which are available on Micron's Web site at www.micron.com/numbering. Information on the corresponding part numbers for part mark codes is available from the FBGA Part Marking Decoder at www.micron.com/decoder.

Figure 2: SOP2/W-PDFN/BGA/LGA Abbreviated Component Mark

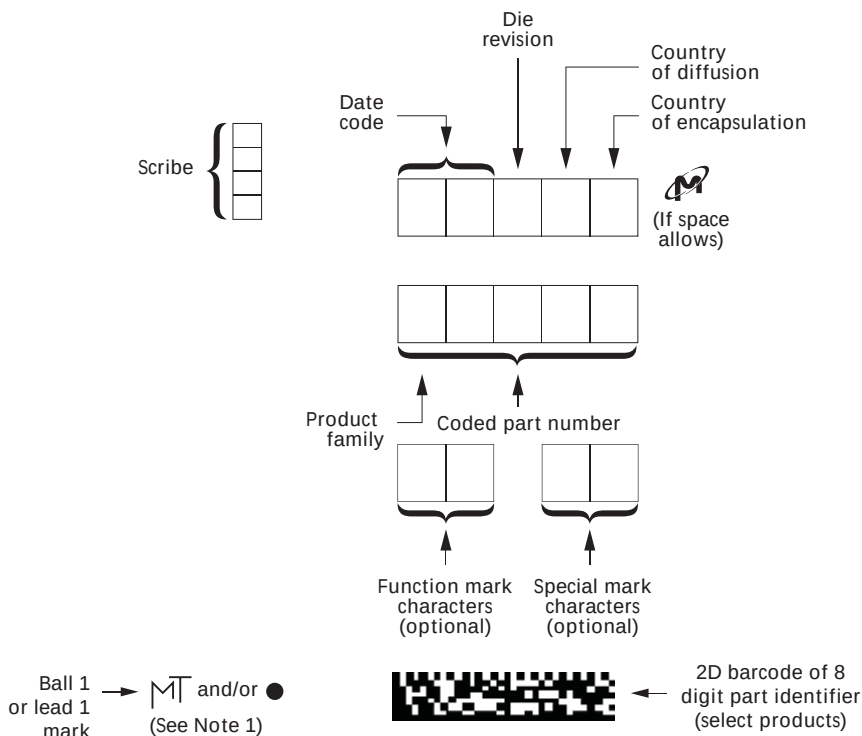

Notes: 1. If the "MT" and "dot" are both present, ball 1 or lead 1 are identified by the "dot."


Figure 3: Legacy BGA Component with Elpida Part Mark

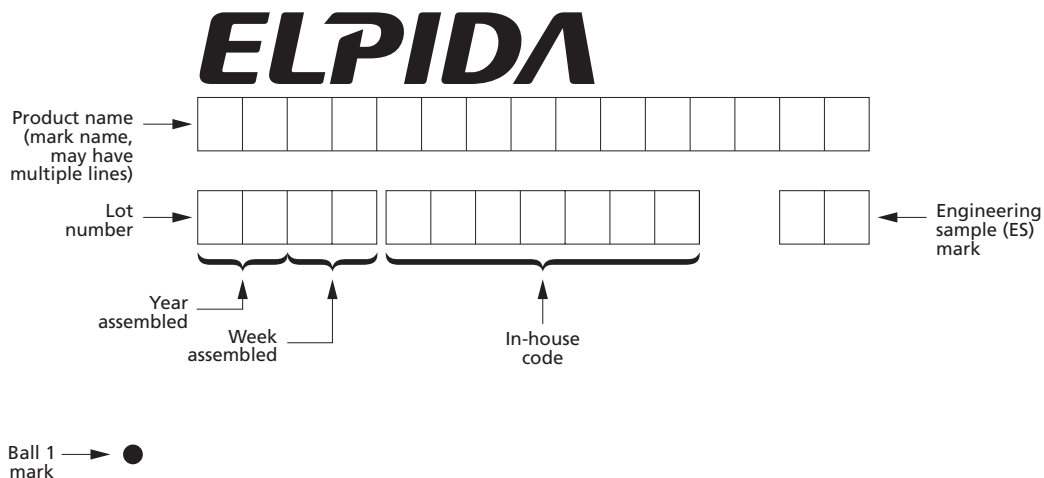

Module Label Data and Examples

Labels used for module production have standard requirements for each line printed on the label, but can vary by type (see Figure 4 through Figure 6). In the following examples Figure 4 is used as the standard label. Micron's module label content and format conform to JEDEC label specifications.

Figure 4: LRDIMM, RDIMM, UDIMM and SODIMM DRAM Module Label Content

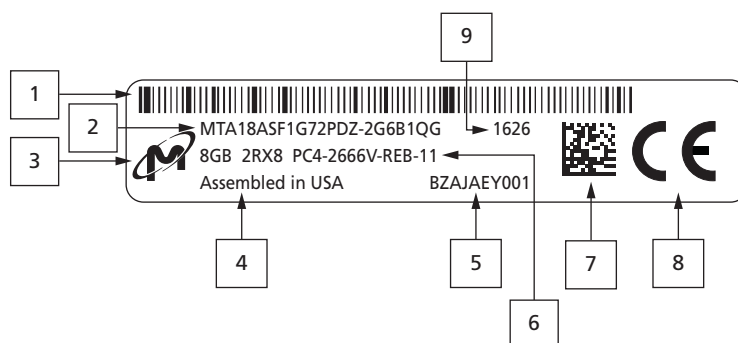


Key note definitions:

1. Code 128 subset B bar code (per ISO/IEC 15417:2007) of Micron part number/date code (YYWW) with a space separator between the data.
Example: MT18ASF1672PDZ-2G6B1 626
2. Micron DRAM module marketing part number
 - 2a. A process code is printed after the last character of RDIMM, LRDIMM, NVDIMM, and ECC UDIMM/SODIMM module part numbers (QG shown; see Tables 1–3)
 - 2b. The process code for ECC UDIMM and SODIMM labels differ slightly as shown in Figure 6. Labels on UDIMMs and SODIMMs without ECC do not have a process code appended to the part number.
 - 2c. For more information about module part numbering, see Module Part Numbering Systems on micron.com
3. Micron logo
4. Module assembly country of origin
5. Module build lot ID
6. DDR4 JEDEC label text (see JEDEC document Module 4.20.28)
 - 6a. Module capacity, ranks, and number of data lines per DRAM device (8GB 2RX8 shown)
 - 6b. DRAM technology (PC4 shown)
 - 6c. Module speed bin (2666V shown)
 - 6d. Module type, reference raw card and revision (REB shown)
 - 6e. JEDEC SPD revision (11 shown)
7. 2D barcode – Encoded data string (per ISO/IEC 15426-2:2005)
 - 7a. Data identifier, S (constant on all modules)
 - 7b. Micron's JEDEC manufacturer code, 802C (constant on all modules)
 - 7c. Manufacturing location, two characters, variable (see Table 5)
 - 7d. Datecode, four characters (YYWW)
 - 7e. Module serial number, eight characters, unique to each module
8. The European Regulatory Requirement mark (may or may not be present on a particular module label)

9. Module date code, four characters (YYWW)

Figure 5: NVDIMM Additional Label Content

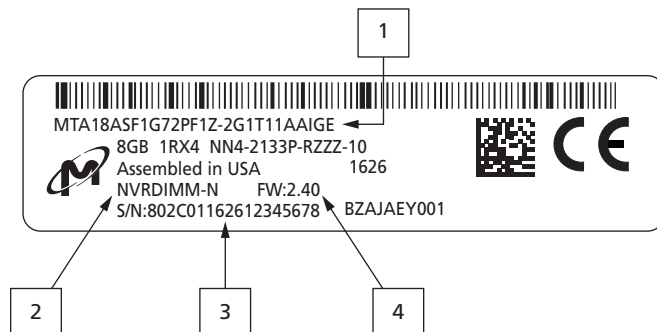


Micron's NVDIMM label has content not included on the standard label. This additional content is described below.

Key note definitions:

1. The process code on the NVDIMM label includes a third character (E shown) that identifies the multiplexer (MUX) vendor and device ID (See Table 4)
2. JEDEC hybrid memory module type
 - 2a. Function designators:
 - N = Persistent
 - F = Block
 - P = Combined
3. 2D barcode data content
 - 3a. Micron's JEDEC manufacturer code (802C shown)
 - 3b. Manufacturing location code (01 shown, see Table 5)
 - 3c. Module date code (1626 shown)
 - 3d. Unique module serial number (12345678 shown)
4. Firmware revision

Figure 6: ECC UDIMM/SODIMM Label Example

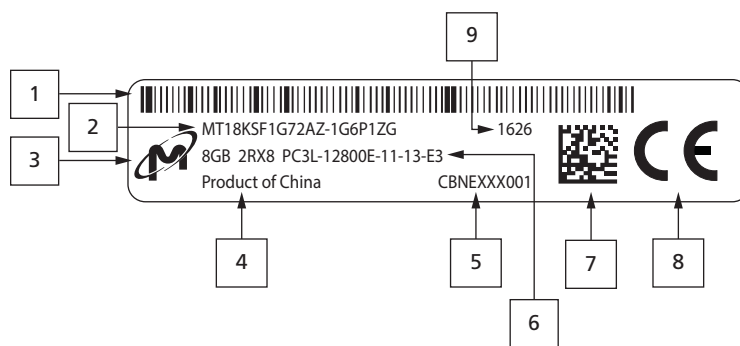

Key note definitions:

1. Code 128 subset B bar code (per ISO/IEC 15417:2007) of Micron part number/date code (YWW) with a space separator between the data
2. Micron DRAM module marketing part number, which has a two-character process code printed after the last character

- 2a. The first character of the process code, Z, is a place holder that means there is no register on the module
- 2b. The second character, G in this case, identifies the temperature sensor manufacturer and device version
- 2c. For more information about module part numbering, see Module Part Numbering Systems on micron.com
3. Micron logo
4. Module assembly country of origin
5. Module build lot ID
6. DDR3 JEDEC label text (See JEDEC Doc. Module 4.20.20)
 - 6a. Module capacity (8GB shown)
 - 6b. Module ranks and number of data lines per DRAM device (2RX8 shown)
 - 6c. DRAM technology and supply voltage (V_{DD} ; PC3L shown)
 - 6d. Module speed bin (12800 shown)
 - 6e. Module type (E shown)
 - 6f. CAS Latency, in clocks (11 shown)
 - 6g. JEDEC SPD revision (13 shown)
 - 6h. Reference raw card and revision (E3 shown)
7. 2D barcode – Encoded data string (per ISO/IEC 15426-2:2005)
 - 7a. Data identifier, S (constant on all modules)
 - 7b. Micron's JEDEC manufacturer code, 802C (constant on all modules)
 - 7c. Manufacturing location, two characters, variable (see Table 5)
 - 7d. Datecode, four characters (YYWW)
 - 7e. Module serial number, eight characters, unique to each module
8. The European Regulatory Requirement mark (may or may not be present on a particular module label)
9. Module date code, four characters (YYWW)

Non-ECC UDIMM and SODIMM module labels do not have a process code ID printed on the label.

Process Codes

The following tables provide the process code options for DDR3 register, DDR4 register clock driver (RCD) and temperature sensor/EEPROM devices.

Table 1: DDR3 Process Code Options

Register Vendor	Register Vendor ID (First Character)	Register Vendor Part Number	Temp Sensor/EEPROM Vendor	Temp Sensor/EEPROM Vendor ID (Second Character)	Temp Sensor/EEPROM Vendor Part Number
IDT	D	SSTE32882HLBAKG8	ST Micro	E	STTS2002B2DN3F
	H	SSTE32882KA1AKG8	Microchip	F	MCP98243T-BE/MNYAA
	M	SSTE32882KB1AKG8	NXP	G	SE97BTP-547
Inph	A	INSSTE32882LV-GS02			
	F	INSSTE32882UV-GS02			
	K	INSSTE32882XV-GS02			
Montage	N	M88SSTE32882H0-T			
TI	B	SN74SSQEA32882ZALR			
	G	SN74SSQEB32882ZALR			
	L	SN74SSQEC32882ZALR			
None	Z	—			

Table 2: DDR4 RDIMM, NVDIMM¹ Process Code Options

RCD Vendor	RCD Vendor ID (First Character)	RCD Vendor Part Number	Temp Sensor/EEPROM Vendor	Temp Sensor/EEPROM Vendor ID (Second Character)	Temp Sensor/EEPROM Vendor Part Number
IDT	I	4RCD0124KC0ATG	IDT	G	TSE2004GB2B0NCG8
	S	4RCD0229KB1	ST Micro	I	STTS2004B2DN3F
Inph	K	IDDR4RCD-GS02	Microchip	K	MCP98244T-BE/MNY
	R	IDDR4RCD2-GS01			
Montage	H	M88DDR4RCD01B1-T			
	M	M88DDR4RCD01C0-T			
	Q	M88DDR4RCD02A0-T			
TI	J	CAB4A6NRR			
None	Z	—			

Notes: 1. DDR4 NVDIMMs' process code includes a third character that identifies the multiplexer (MUX) vendor and device version (see Table 4).

Table 3: DDR4 LRDIMM Process Code Options

RCD/Data Buffer Vendor	RCD/Data Buffer Vendor ID (First Character)	RCD Vendor Part Number Data Buffer Vendor Part Number	Temp Sensor/ EEPROM Vendor	Temp Sensor/ EEPROM Vendor ID (Second Character)	Temp Sensor/ EEPROM Vendor Part Number
IDT	I	4RCD0124KC0ATG 4DB0124KB1AVG53	IDT	G	TSE2004GB2B0NCG8
	P	4RCD0124KC0ATG 4DB0226KA3	ST Micro	I	STTS2004B2DN3F
	S	4RCD0229KB1 4DB0226KB0	Microchip	K	MCP98244T-BE/MNY
Inph	L	IDDR4RCD-GS02 IDDR4DB-GS02			
	N	IDDR4RCD-GS02 IDDR4DB-GS03			
	R	IDDR4RCD2-GS01 IDDR3DB2-GS02			
Montage	H	M88DDR4RCD01B1-T M88DDR4DB01A1-T			
	M	M88DDR4RCD01C0-T M88DDR4DB01B0-T			
	Q	M88DDR4RCD02A0-T M88DDR4DB02A1-T			
TI	J	CAB4A6NRR DQB4A3KSR			
None	Z	—			

Table 4: DDR4 NVDIMM Process Code Third Character Options

MUX Vendor	Process Code Character	Vendor Part Number
IDT	C	4MX0121VA13AVG8
TI	D	TS3DDR4000ZBAR
NXP	E	CBTV24DD12
NXP/TI	F	CBTV24DD12 (address/command) and TS3DDR4000ZBAR (data)

Table 5: Module Manufacturing Locations

Location	ID Number	Hexadecimal Value
SIG (Boise)	01	0x01
AGPR (Puerto Rico)	12	0x0C
PNG (Penang, Malaysia)	04	0x04
SING (Singapore)	08	0x08
EKUK (Scotland)	09	0x09
MXA (Xian, China)	15	0x0F

SSD Label Information


Figures 7 through 12 show the label structures for our SSD products. The figures have designated “key notes” that outline the details of each particular item on the label.

Micron has added a manufacturing identification (MID) label to all SSD products. This 2D barcode label is for Micron internal use only.

Figure 7: SSD MID Label



Figure 8: Micron Standard 2.5 SSD Label Structure

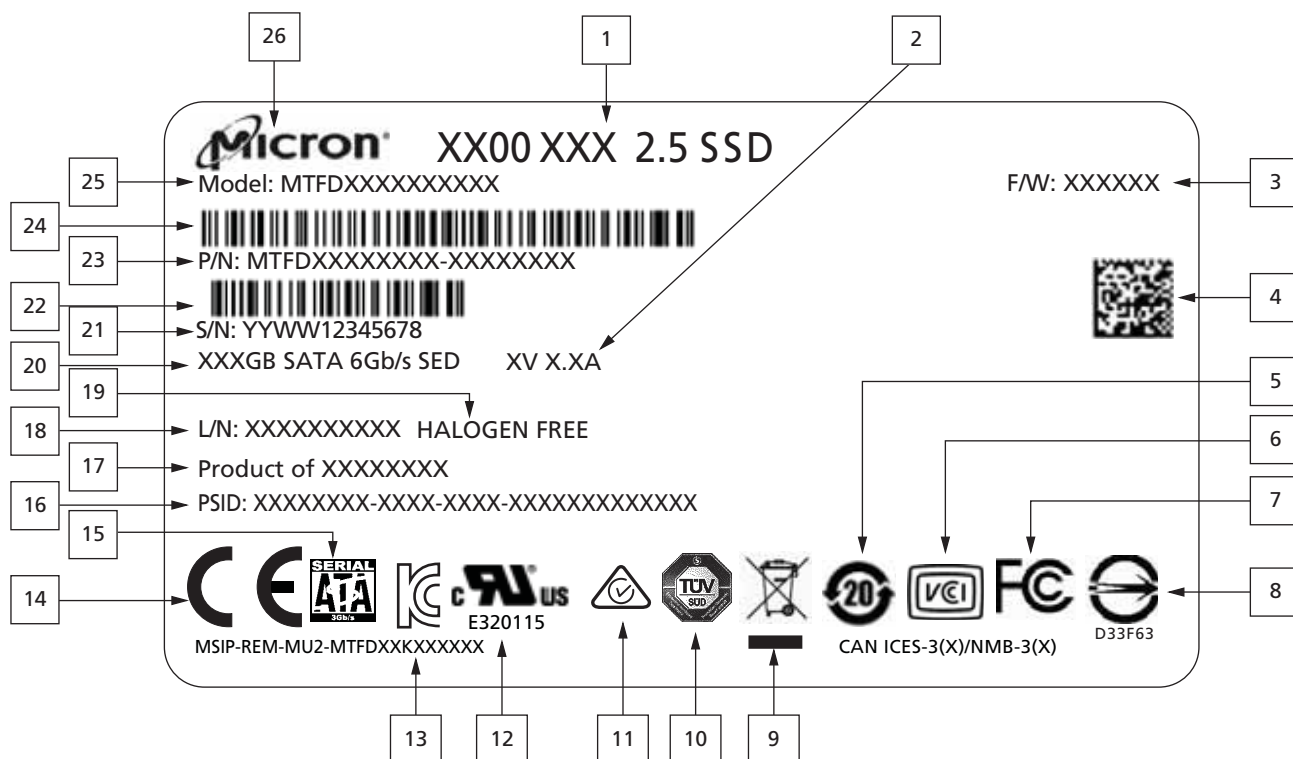


Key note definitions:

1. Market segment, form factor, product and FIPS security (if applicable)
 - 1a. Example: 1100 2.5 SSD FIPS 140-2 L2
2. The device's voltage level with its related amperes at normal operation (defined by Micron QRA)
3. Drive firmware revision number
4. PSID data matrix (2D) barcode
5. Reserved for the official China Restriction of Hazardous Substances mark
 - 5a. This device must meet the standards of China RoHS to enable the 20 year indication of the RoHS mark
6. Reserved for the official Japan VCCI mark

7. Reserved for the official USA Federal Communications Commission (FCC) mark
8. Reserved for the official Taiwan Bureau of Standards Metrology and Inspection (BSMI) mark
In addition, the certification number assigned to this Micron product shall be listed below the mark in a legible font
9. Reserved for the official European Waste Electrical and Electronics Equipment (WEEE) mark
10. Reserved for the official TUV mark
11. Reserved for the official RCM (Australian) mark
12. Reserved for the official Underwriters Laboratories (UL) mark
13. Reserved for the official Korean Certification (KC) mark
In addition, the certification number assigned to this Micron product shall be listed below the mark in a legible font
14. Reserved for the official European Regulatory Requirement mark
15. Reserved for the official mark based on the drive interface (SATA, SAS, and so on)
16. PSID alphanumeric code
17. Country where the device is assembled, written in English
 - 17a. With the exception of “USA” and “UK,” the full English name of the country should be included: for example, Product of Taiwan
18. Lot number for tracking the drive’s manufacturing data
 - 18a. This is listed as xxyyyzzz
 - 18b. xx = 2 digits to denote manufacturing site
 - 18c. yyy = 3 digits to denote the kit number (randomly generated)
 - 18d. zzz = 3 digits denoting a subplot size (to provide greater resolution of manufacturing information)
19. Halogen-free mark indicating that the drive meets the IPC low-halogen requirements
20. Drive’s capacity, product type, maximum interface rate, and security feature set (SED, Opal 2, FIPS, and so on, if applicable)
 - 20a. Example: 512GB SATA 6Gb/s SED
21. Drive serial number
 - 21a. Format: 12 characters: YYWWXXXXXXXX
YY is the current year
WW is the current Micron workweek
XXXXXXXX is an eight digit hex (base 16 0–9, A–F) serial number
22. Drive serial number bar code for item #22 data (follows the Code 128 standard)
23. Drive part number
24. Drive part number bar code for item #24 data (follows the Code 128 standard)
25. Micron model number
26. Micron logo

Not shown is the worldwide name assigned to Micron (as defined by IEEE), which may or may not be present on the label. WWN: 500A0751XXXXXXXX

Figure 9: 2.5-inch Label Structure – M5XX(DC/IT)/M600

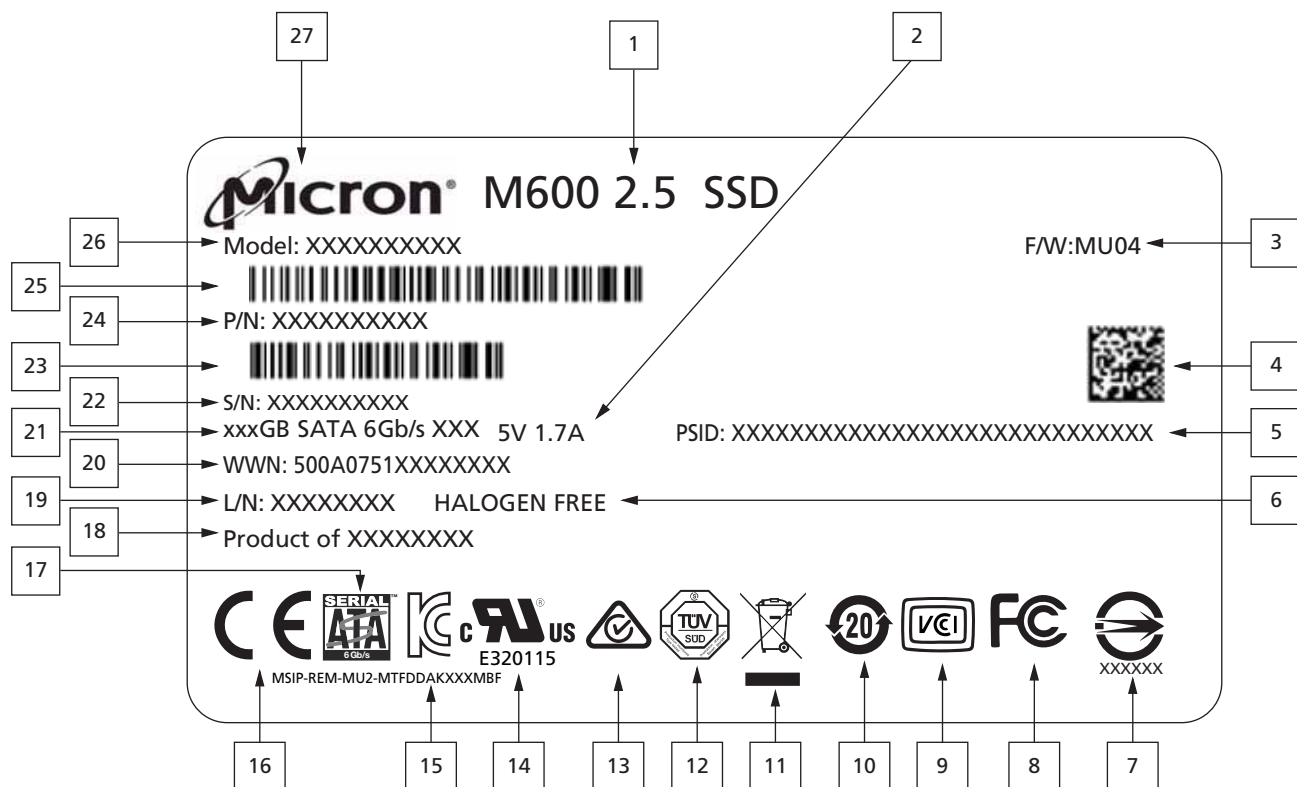


Key note definitions:

1. Market segment, form factor and product
 - 1a. Example: M600 2.5 SSD
2. The device's voltage level with its related amperes at normal operation (defined by Micron QRA)
3. Drive firmware revision number
4. PSID data matrix (2D) barcode
5. PSID alphanumeric code
6. Halogen-free mark indicating that the drive meets the IPC low-halogen requirements
7. Reserved for the official Taiwan Bureau of Standards Metrology and Inspection (BSMI) mark

In addition, the certification number assigned to this Micron product shall be listed below the mark in a legible font
8. Reserved for the official USA Federal Communications Commission (FCC) mark
9. Reserved for the official Japan VCCI mark
10. Reserved for the official China Restriction of Hazardous Substances mark
 - 10a. This device must meet the standards of China RoHS to enable the 20 year indication of the RoHS mark
11. Reserved for the official European Waste Electrical and Electronics Equipment (WEEE) mark
12. Reserved for the official TUV mark
13. Reserved for the official RCM (Australian) mark
14. Reserved for the official Underwriters Laboratories (UL) mark

15. Reserved for the official Korean Certification (KC) mark
In addition, the certification number assigned to this Micron product shall be listed below the mark in a legible font
16. Reserved for the official European Regulatory Requirement mark
17. Reserved for the official mark based on the drive interface (SATA, SAS, and so on)
18. Country where the device is assembled, written in English
 - 18a. With the exception of “USA” and “UK,” the full English name of the country should be included: for example, Product of Taiwan
19. Lot number for tracking the drive’s manufacturing data
 - 19a. This is listed as xxyyyyyzzz
 - 19b. xx = 2 digits to denote manufacturing site
 - 19c. yyyyy = 5 digits to denote the kit number (randomly generated)
 - 19d. zzz = 3 digits denoting a subplot size (to provide greater resolution of manufacturing information)
20. Worldwide name assigned to Micron (as defined by IEEE)
21. Drive’s capacity, product type, maximum interface rate, and security feature set (SED, Opal 2, FIPS, and so on, if applicable)
 - 21a. Example: 512GB SATA 6Gb/s SED
22. Drive serial number
 - 22a. Format: 12 characters: YYWWXXXXXXXX
YY is the current year
WW is the current Micron workweek
XXXXXXXX is an eight digit hex (base 16 0–9, A–F) serial number
23. Drive serial number bar code for item #22 data (follows the Code 128 standard)
24. Drive part number
25. Drive part number bar code for item #24 data (follows the Code 128 standard)
26. Micron model number
27. Micron logo

Figure 10: Micron Standard M.2 SSD Label Structure

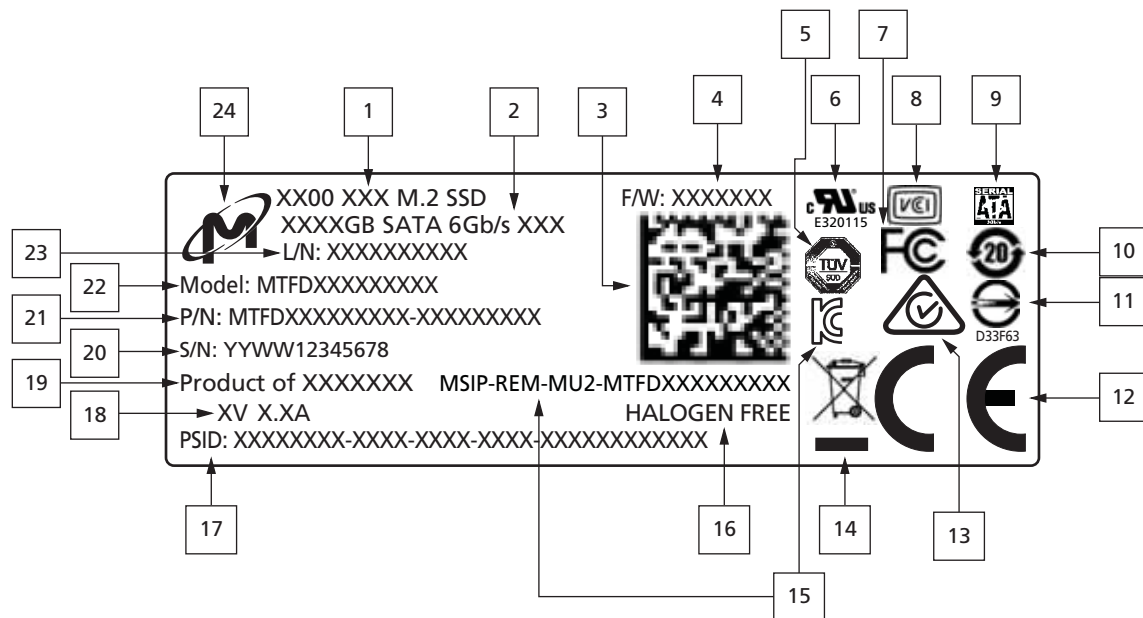

Key note definitions:

1. Market segment, form factor and product and FIPS security (if applicable)
 - 1a. Example: 1100 M.2 SSD FIPS 140-2 L2
2. Drive's capacity, product type, maximum interface rate, and security feature set (SED, Opal 2, FIPS, and so on, if applicable)
 - 2a. Example: 512GB SATA 6Gb/s SED
3. Data matrix (2D) barcode containing the drive serial number, drive part number, and PSID (if applicable for a security feature enabled drive)
4. Drive firmware revision number
5. Reserved for the official TUV mark
6. Reserved for the official Underwriters Laboratories (UL) mark
7. Reserved for the official USA Federal Communications Commission (FCC) mark
8. Reserved for the official Japan VCCI mark
9. Reserved for the official mark based on the drive interface (SATA, SAS, and so on)
10. Reserved for the official China Restriction of Hazardous Substances mark
 - 10a. This device must meet the standards of China RoHS to enable the 20 year indication of the RoHS mark
11. Reserved for the official Taiwan Bureau of Standards Metrology and Inspection (BSMI) mark


In addition, the certification number assigned to this Micron product shall be listed below the mark in a legible font
12. Reserved for the official European Regulatory Requirement mark
13. Reserved for the official RCM (Australian) mark
14. Reserved for the official European Waste Electrical and Electronics Equipment (WEEE) mark
15. Reserved for the official Korean Certification (KC) mark.

In addition, the certification number assigned to this Micron product shall be listed below the mark in a legible font

16. Halogen-free mark indicating that the drive meets the IPC low-halogen requirements
17. PSID alphanumeric code
18. The device's voltage level with its related amperes at normal operation (defined by Micron QRA)
19. Country where the device is assembled, written in English
 - 19a. With the exception of "USA" and "UK," the full English name of the country should be included: for example, Product of Taiwan
20. Drive serial number
 - 20a. Format: 12 characters: YYWWXXXXXXXXXX
YY is the current year
WW is the current Micron workweek
XXXXXXXX is an eight digit hex (base 16 0–9, A–F) serial number
21. Drive part number
22. Micron model number
23. Lot number for tracking the drive's manufacturing data
 - 23a. This is listed as xxyyyyyzzz
 - 23b. xx = 2 digits to denote manufacturing site
 - 23c. yyyyy = 5 digits to denote the kit number (randomly generated)
 - 23d. zzz = 3 digits denoting a subplot size (to provide greater resolution of manufacturing information)
24. Micron logo

Not shown is the worldwide name assigned to Micron (as defined by IEEE), which may or may not be present on the label. WWN: 500A0751XXXXXXXX

Figure 11: mSATA Label Structure – M6XX

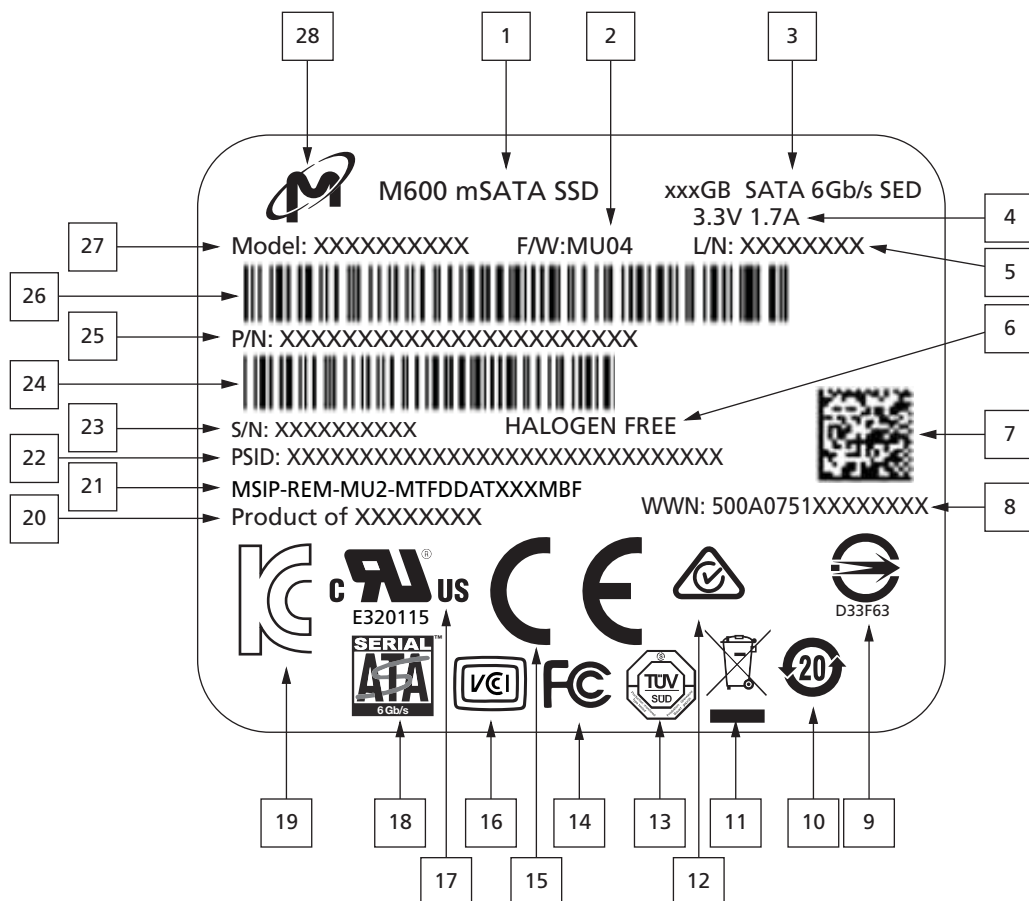


Key note definitions:

1. Market segment, form factor and product
 - 1a. Example: M600 mSATA SSD
2. Drive firmware revision number
3. Drive's capacity, product type, maximum interface rate, and security feature set (SED, Opal 2, FIPS, and so on, if applicable)
 - 3a. Example: 512GB SATA 6Gb/s SED
4. The device's voltage level with its related amperes at normal operation (defined by Micron QRA)
5. Lot number for tracking the drive's manufacturing data
 - 5a. This is listed as xxyyyyyzzz
 - 5b. xx = 2 digits to denote manufacturing site
 - 5c. yyyyy = 5 digits to denote the kit number (randomly generated)
 - 5d. zzz = 3 digits denoting a subplot size (to provide greater resolution of manufacturing information)
6. Halogen-free mark indicating that the drive meets the IPC low-halogen requirements
7. PSID data matrix (2D) barcode
8. Worldwide name assigned to Micron (as defined by IEEE)

9. Reserved for the official Taiwan Bureau of Standards Metrology and Inspection (BSMI) mark
In addition, the certification number assigned to this Micron product shall be listed below the mark in a legible font
10. Reserved for the official China Restriction of Hazardous Substances mark
 - 10a. This device must meet the standards of China RoHS to enable the 20 year indication of the RoHS mark
11. Reserved for the official European Waste Electrical and Electronics Equipment (WEEE) mark
12. Reserved for the official RCM (Australian) mark
13. Reserved for the official TUV mark
14. Reserved for the official USA Federal Communications Commission (FCC) mark
15. Reserved for the official European Regulatory Requirement mark
16. Reserved for the official Japan VCCI mark.
17. Reserved for the official Underwriters Laboratories (UL) mark
18. Reserved for the official mark based on the drive interface (SATA, SAS, and so on)
19. Reserved for the official Korean Certification (KC) mark
20. Country where the device is assembled, written in English
 - 20a. With the exception of “USA” and “UK,” the full English name of the country should be included: for example, Product of Taiwan
21. The KC number assigned to this Micron product.
22. PSID alphanumeric code
23. Drive serial number
 - 23a. Format: 12 characters: YYWWXXXXXXXX
YY is the current year
WW is the current Micron workweek
XXXXXXXX is an eight digit hex (base 16 0–9, A–F) serial number
24. Drive serial number bar code for item #23 data (follows the Code 128 standard)
25. Drive part number
26. Drive part number bar code for item #25 data (follows the Code 128 standard)
27. Micron model number
28. Micron logo

Figure 12: Embedded USB Label Structure

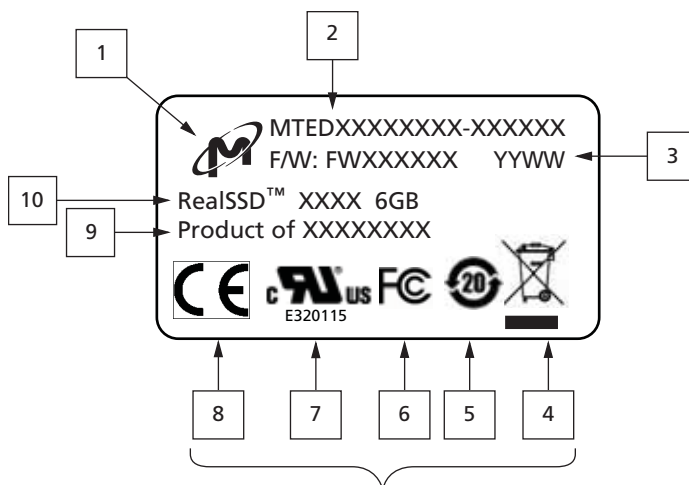

Labels for engineering samples
replace these logos with text: ENGINEERING SAMPLE.

Key note definitions:

1. Micron logo
2. USB part number
3. Firmware revision, lot ID for tracking the USB's manufacturing data (if applicable) and date code 4- or six-digit
 - 3a. Format: YYWW or YYYYWW
YY or YYYY is the current year
WW is the current Micron workweek
4. Reserved for the official European Waste Electrical and Electronics Equipment (WEEE) mark
5. Reserved for the official China Restriction of Hazardous Substances mark
 - 5a. This device must meet the standards of China RoHS to enable the 20 year indication of the RoHS mark
6. Reserved for the official USA Federal Communications Commission (FCC) mark
7. Reserved for the official European Regulatory Requirement mark
8. Reserved for the official Underwriters Laboratories (UL) mark
9. Country where the device is assembled, written in English
10. Lead free statement (if applicable), Micron model number and density (if applicable)
 - 10a. Example: RealSSD™ e230 6GB or MTEDXXXXXXXX

Micron Packaging Labels

Micron uses various packaging labels to enable quick identification of packaged contents, provide a simple order verification method, and indicate inner-package moisture levels. All labels are manufactured from matte-coated facestock or synthetic paper and contain acrylic- or water-based adhesive. See CSN-16 for complete information on all Micron packaging materials, including recyclable materials.

Master Container Labels

For all shipments, Micron uses standard bar code labels that conform to EIA Standard 556. The bar code labels enable customers to scan Micron containers for quick order verification. Figure 14 on page 22 shows an example of the standard bar code label used on master containers. Each box also carries its own bar code label (see the Individual Packaging Labels section).

Bar Code Information

The following information appears on the master container labels only:

- (3S/4S) - PKG ID: Invoice or packing slip number
- (1P) - SPLR PROD ID: Reserved for individual customer requirements
- (Q) - QUANTITY: Number of parts in master container
- (K) - TRANS ID: Customer purchase order number
- (P) - CUST PART NO: If a customer part number is not designated, the Micron part number will be printed
- (4L) - Country of Origin: The country in which the product was made

Figure 13: Standard Master Container Shipping Label

Micron Technology, Inc. For Company Name 8000 S. Federal Way BOISE ID 83707-0006 USA		US01
		COMPANY NAME ADDRESS CITY STATE/PROVINCE ZIP CODE COUNTRY
WB # 638030055867 / 0087659818 Child W/B: 00821466		
		

Piece 1 of 1 *****	PKG ID: 87659819A1	
PO #s XXXXXXXX XXXXXXXX		

Figure 14: Standard Master Container Bar Code Label

(3S) PKG ID: 417904839 		Ship_To_Name Address City, ST ZIP Code Country	
(Q) QUANTITY: 2500 	(4L) Coutry of Origin  TW	PACKAGE COUNT: 1 OF 1 25.9 x 15.0 x 27.9 In 66.3 x 38.6 x 71.4 Cm	Micron Technology, Inc. 1160 Exchange, Doc 1D Boise ID 83715 USA
(1P) SPLR PROD ID: 417904839 			
(K) TRANS ID: 4505469156 			
(P) CUST PART NO: MT41K256M16TW 			
PACKAGE WEIGHT 2.7 LBS / 1.2 KGS		SHIP DATE 03/20/2017	

Additional Label Information

The following information appears in the upper right and bottom portion of the master container labels and may differ slightly depending on whether the label has a (3S) or (4S) PKG ID:

- Ship-to name: Customer's name and ship-to address
- Ship-from name: Micron's name and address
- PACKAGE COUNT (3S): Master container package count, or
TOTAL COUNT (4S): Master container package count
 - (3S) label includes master container size in inches and centimeters
- PACKAGE WEIGHT (3S): Package weight in pounds and kilograms, or
TOTAL WEIGHT (4S): Master container weight in pounds and kilograms
- SHIP DATE: Date the product leaves the factory

Individual Packaging Labels

For quick order verification, Micron attaches a standard bar code label and inner packing container label on the inner packing container. Additionally, the moisture-barrier or static-shielding bag has a moisture sensitivity (MST) label and a standard bar code label attached to the front. If ordering in tape and reel, the tape-and-reel carrier will have a standard bar code label attached. Figure 15 on page 23 shows an example of the standard bar code label, Figure 16 on page 23 shows an example of Micron's inner packing container label, and Figure 18 on page 24 shows an example of Micron's MST label. Refer to Figure 19 on page 24 for approximate placement of these labels on Micron's moisture-barrier and static-shielding bags.

Figure 15: Standard Bar Code Label

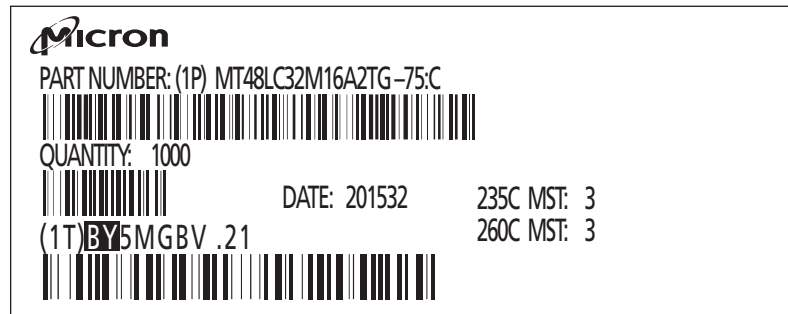


Figure 16, Micron's Inner Packing Container Label, indicates the RoHS status of compliance with either RoHS or RoHS and HF (for those products that are also free of halogens). This space will be blank on labels for containers that hold parts with lead. Also, an asterisk (*) at the end of the date code indicates that the container holds a mix of product from more than one date; the date shown is that of the oldest product in the container. The "VID..." text is printed on the label as applicable for specific products.

Figure 16: Micron's Inner Packing Container Label


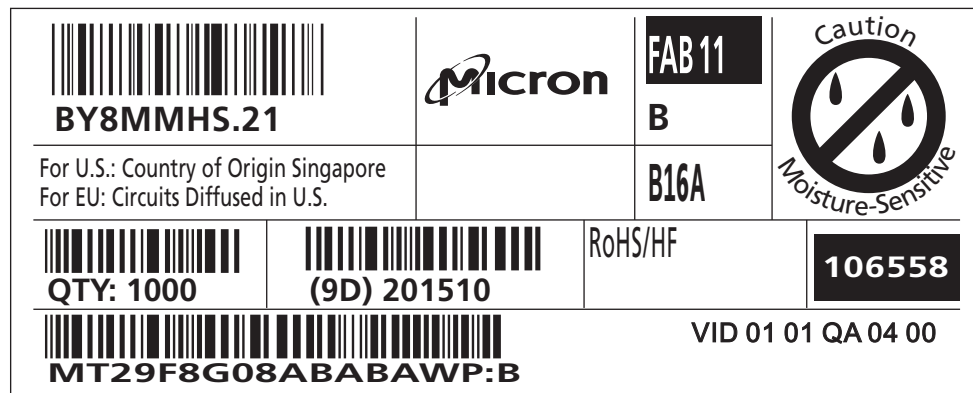


Figure 17: Micron's Inner Packing Container Label for Modules and SSDs

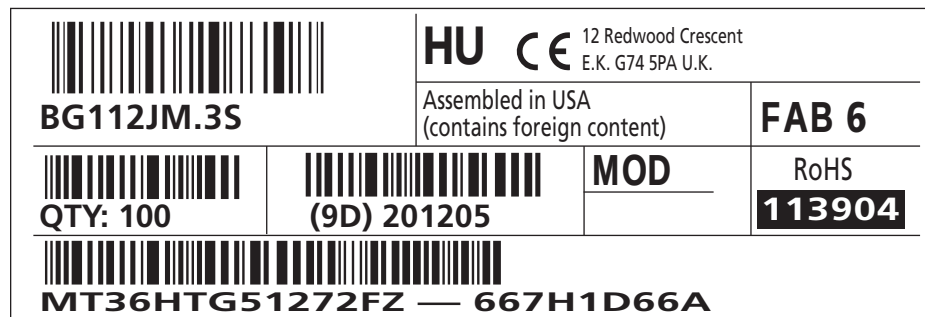


- Notes: 1. The European Regulatory Requirement mark may or may not be present on a particular inner packing label.

Figure 18: Micron's Moisture Sensitivity (MST) Label

235C	Peak Package Body Temp	Moisture Level:	2
Floor Life: One Year Condition < = 30 deg. C/60% RH			
260C	Peak Package Body Temp	Moisture Level:	2
Floor Life: One Year Condition < = 30 deg. C/60% RH			
Package Seal Date: Apr 08 2004			
Operator: JDOE			

Figure 19: Labeling on Moisture-Barrier and Static-Shielding Bags¹

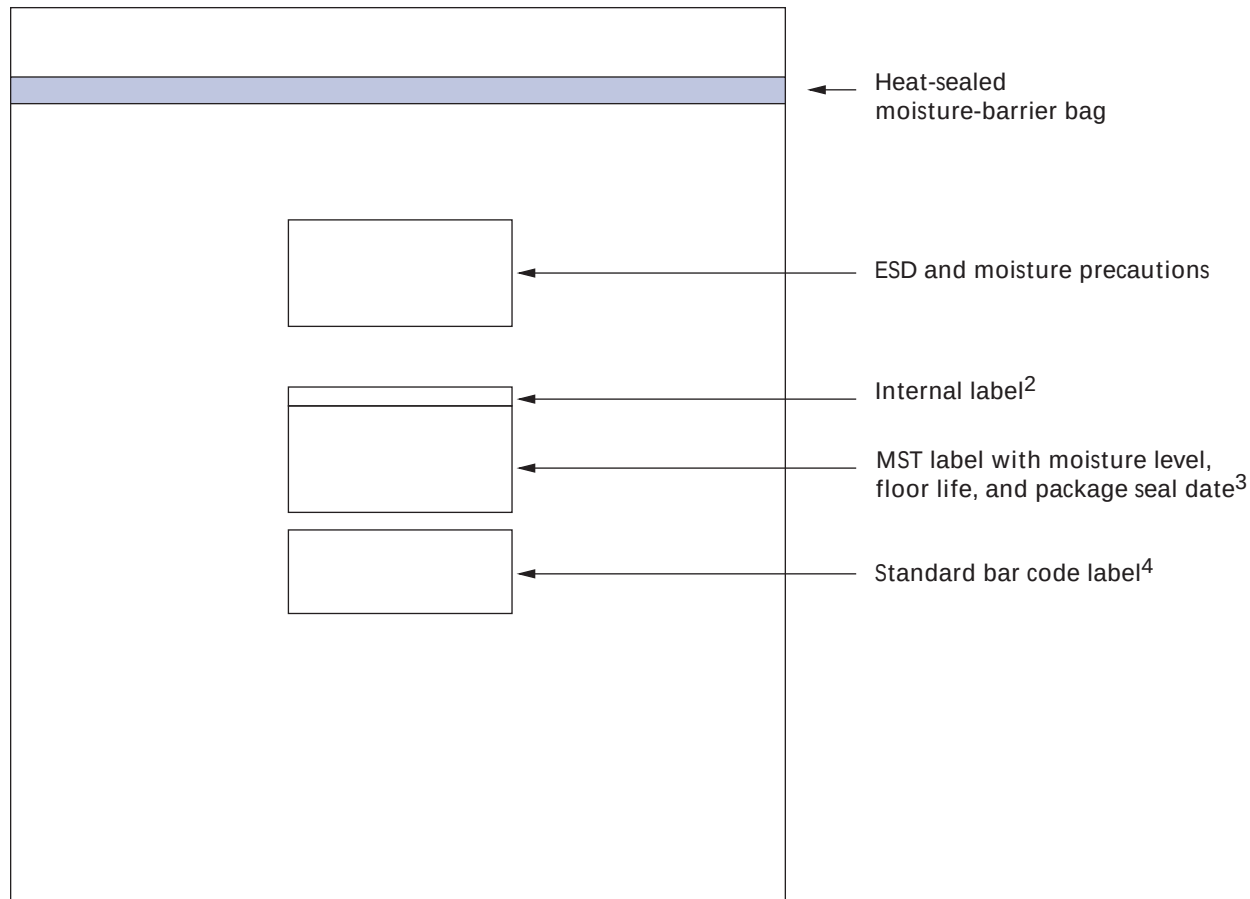

- Notes:
1. This figure indicates the approximate locations only of the various labels.
 2. Internal labels are applicable to tube and tray shipments only and may or may not be present on every bag.
 3. See Figure 18.
 4. See Figure 15.



CSN-11: Product Marks/Product and Packaging Labels Individual Packaging Labels

8000 S. Federal Way, P.O. Box 6, Boise, ID 83707-0006, Tel: 208-368-3900
www.micron.com/productsupport Customer Comment Line: 800-932-4992
Micron and the Micron logo are trademarks of Micron Technology, Inc.
All other trademarks are the property of their respective owners.



Revision History

Rev. AF	7/17
• Updated Figure 16	
Rev. AE	5/17
• Updated Data matrix (2D) barcode description for Figure 10	
• Deleted Figures 11 and 12 (EoL product)	
Rev. AD	3/17
• Updated Figure 16 and the following explanatory paragraphs	
Rev. AC	11/16
• Added Table of Contents and List of Figures	
• Updated Figures 1 and 2	
• Updated and expanded Module Label Data and Examples	
– Added Process Codes	
• Updated all SSD labels and key note definitions	
• Updated Figures 15 through 19	
Rev. AB	5/16
• Added DDR3, DDR4 Process Code Reference section	
Rev. AA	3/16
• Corrected typo in Note 3 of Figure 4	
• Updated Figures 12, 16 and added new Figure 17. 1/16	
Rev. Z	10/15
• Updated module label explanation and notes.	
• Added M6xx SSD labels.	
• Deleted links to specific SSD label figures under SSD Label Information.	
• Added Table of Contents and List of Figures.	
• Updated Figure 2 title.	
Rev. Y	7/15
• Added SSD MID label.	
Rev. X	5/15
• Updated Figure 4.	
• Updated Figure 23.	
Rev. W	5/15
• Added Note 2 to Figure 4.	
Rev. V	10/14
• Updated information on page one.	
• Added information for legacy components with Elpida part marks.	
• Added DC and IT mark to M5xx SSD label title.	
• Added 2.5in P420m label information.	
Rev. U	7/14
• Added M.2 M510/M550 label.	



CSN-11: Product Marks/Product and Packaging Labels Revision History

Rev. T	1/14
• Added “.../date code (YWW)” to Line 1 of the Module Label Information section.	
Rev. S	12/13
• Added European Regulatory Requirement logo and note to Figures 3 and 20.	
• Corrected numbering on pages 4 and 5.	
Rev. R	8/13
• Corrected label titles for Figure 9, Figure 16, and Figure 17.	
Rev. R	7/13
• Added new SSD labels.	
Rev. Q	5/13
• Added new SSD labels.	
Rev. P	2/13
• Updated Inner Packing Container and Standard Master Container Shipping labels.	
• Corrected note references for Figure 15.	
Rev. O	6/12
• Added Microdisplay panel label.	
Rev. N	3/12
• Added the Embedded USB label.	
Rev. M	2/12
• Added the SSD mSATA label.	
Rev. L	2/12
• Corrected references in Figure 12.	
Rev. K	10/11
• Updated security feature set to Figure 6 and it’s notes.	
Rev. J	6/11
• Added aliases to the links for the part numbering guides and FBGA date codes, and the FBGA Part Marking Decoder.	
• Added specific date code information.	
• Updated country codes.	
• Added SSD C400 label information.	
Rev. H	2/10
• Added date code information to the text for Figure 9	
Rev. G	1/10
• Corrected typo	
Rev. F	12/09
• Added SSD product labels	
• Added packaging label information from CSN-16	
Rev. E	10/09
• Updated template	
• Updated Figure 3, “Module Label”	



Rev. D.....	6/08
• Added Korea to note 1 country codes • Updated and renamed Figure 2 • Deleted Figure 3, “DDR2/GDDR3 FBGA Abbreviated Component Mark”	
Rev. C.....	5/07
• Added Taiwan to note 1 country codes	
Rev. 12/9/05	
• Added logo information to Figure 1 on page 5 and Figure 2 on page 6	
Rev. 2/14/05	
• Added China to note 1 country codes	